DS-D5032F3-1V0S(海外标配)(美标)
32 inch FHD 75Hz VA Monitor with Speaker



- VA technology，178° ultra-wide view screen.
- 8 bit LVDS FHD (1920 × 1080) display.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

▪ Specification

Display	
Screen Size	32 inch
Active Display Area	698.4 (H) mm × 392.85 (V) mm
Resolution	1920 × 1080
Backlight	D-LED
Pixel Pitch	0.12125 (H)mm x 0.36375 (V) mm
Brightness	300 cd/m²
Viewing Angle	178° (H) / 178° (V)
Color Depth	8 bit
Contrast Ratio	4000 ：1
Response Time	8 ms
Refresh Rate	Typ. 60 Hz， Max. 75 Hz
Haze	Haze 2 %
Reliability	7 × 24 H
Color Gamut	72 % NTSC
Interface	
Video & Audio Input	VGA × 1， HDMI 1.4 × 1， Audio Output × 1
Video & Audio Output	Speaker(8Ω 10W) × 2
Data Transmission Interface	None
Control Interface	None
Power	
Power Supply	100~240 VAC, 50/60 Hz
Power Consumption	≤ 48 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0□ to 40 □ (32 □ to 104 □)
Working Humidity	20% to 90% RH (Non-Condensing)
Storage Temperature	-20 □ to 60 □ (-4 □ to 140 □)
Storage Humidity	10% to 90% RH (Non-Condensing)
General	
Casing Material	Plastic
VESA	100 mm × 100 mm (4 - M6 × 10 mm)
Bezel Width	16.7 mm (top/left/right), 20.5 mm (bottom)
Product Dimensions (W × H × D)	With base: 735.08 (W) mm × 489.16 (H) mm × 207.95 (D) mmWithout base: 735.08 (W) mm × 433.46 (H) mm × 80.19 (D) mm
Package Dimensions (W × H × D)	808 (W) mm × 510 (H) mm × 140 (D) mm
Net Weight	4.55 ± 0.5 kg
Gross Weight	6.1 kg ± 0.5 kg
Packing List	Monitor × 1, Base component × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1， remote control × 1 , Base screw × 6， Wall-mount screw × 4
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

▪ Physical Interface




Interface	Description	Interface	Description
POWER	AC power input interface	HDMI	HDMI 1.4 digital signal input interface
VGA	VGA analog signal input	AUDIO OUT	3.5 mm Audio output interface

▪ Available Model

DS-D5032F3-1V0S(美标)

▪Dimension

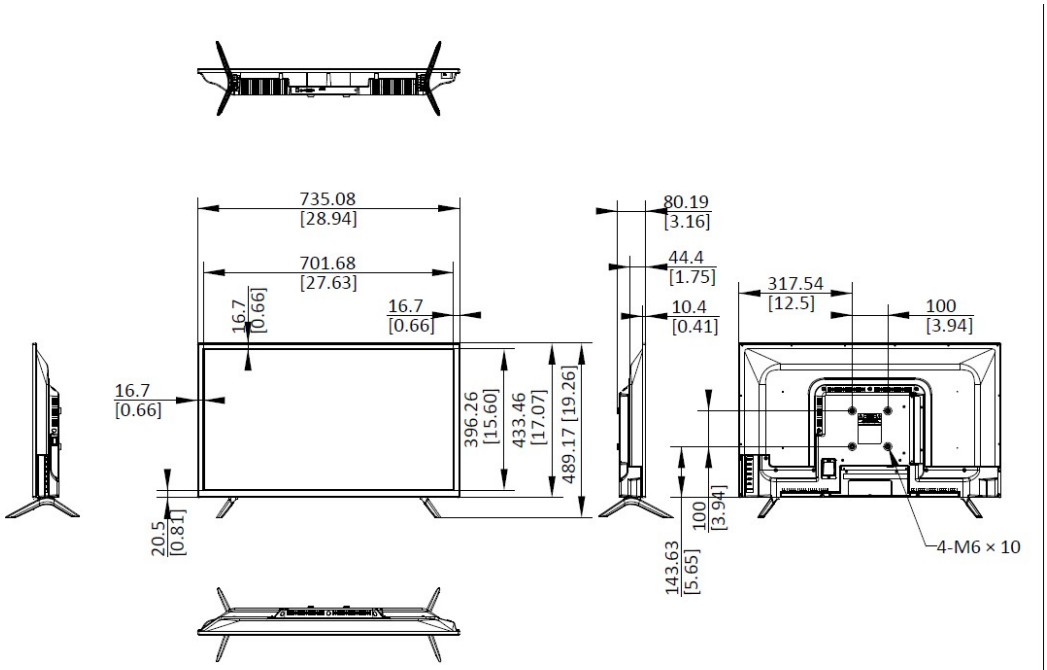

Unit: mm [inch]

▪ Accessory

▪Optional

DS-DM1940W Wall-mounted Bracket



See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®